



BUFF

CHESTNUT

ROOFING SYSTEMS

WHAT CAN YOU EXPECT FROM YOUR MULE-HIDE **SELF-ADHERING MODIFIED BITUMEN ROOF?**

FAST, CLEAN, SAFE INSTALLATION

Crews simply place, remove release film, and roll with no flames, fumes, odors.

ATTRACTIVE ROOF, ENERGY EFFICIENT OPTIONS

Attractive ceramic granule surface (available in 12 popular colors). Manufactured with patented Adeso® self-adhesive technology using reinforced membrane and proprietary adhesive formulation on the bottom surface provides for long lifecycle.

STRENGTH

Mule-Hide Self-Adhering Modified Bitumen Roofing Systems are the result of the latest adhesive technology combined with proven waterproofing compounds. SEALLap® & FASTLap® engineering provides stronger, more reliable seams.

REPAIRABLE

MULE-HIDE PRODUCTS

Mule-Hide Self-Adhering Modified Bitumen membrane are manufactured with high quality compounds and remain repairable year after year, allowing for ease of future cutouts and tie-ins.

"The name trusted in roofing since 1906"

ENVIRONMENTALLY FRIENDLY

No fumes, no flames and no pollution.

RED BLEND OAK

WEATHER

MOOD

BLACK

PINE GREEN

GREY SLATE

(SPECIAL ORDER) GREEN

(SPECIAL ORDER)




WHAT MORE COULD YOU WANT?

A ROOF WITH FAST, CLEAN INSTALLATION WITH CHOICE OF 12 CAP SHEET COLORS

Mule-Hide Self-Adhering Modified Bitumen features the time-proven modified bitumen formulations installed for years but without the asphalt bleed-out and mess. Crews simply place, remove release film, and roll. Patented pressure sensitive adhesive manufacturing technologies deliver a roofing system with reliable seams and years of field-proven performance through winters and summers, in cold and hot climates. It's fast, clean, and safe for minimal disruption to building operations and occupants. No hot kettles, no flames, and fume free.

A MULE-HIDE SELF-ADHERING MODIFIED BITUMEN ROOF GIVES YOU INSTALLED COST VALUE AND PEACE OF MIND

- Reinforced membrane offers long-term, water tight integrity you can count on
- No hot asphalt, flames, or fumes near building occupants
- Minimal disruption to building operations and the environment
- Fast installation combined with a long lifecycle means installed cost value
- Membrane meets or exceeds ASTM performance standards
- UL and FM listed assemblies available
- Extensive warranty program

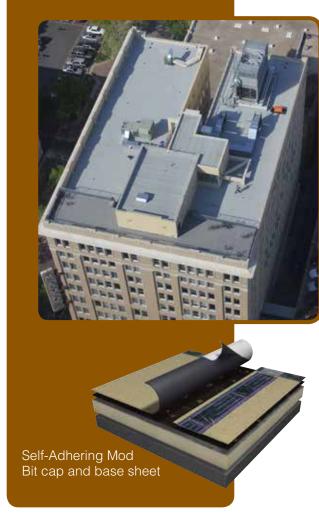

FOR MORE INFORMATION PLEASE CONTACT:

"The name trusted in roofing since 1906"

Customer Line: 800-786-1492 • www.mulehide.com

Check our website monthly for the latest updates & technical bulletins.

National Support Center • 1195 Prince Hall Drive • Beloit, WI 53511 • tel. 608.365.3111 • fax. 608.365.7852



The information herein should not be considered all-inclusive and should always be accompanied by a review of the Mule-Hide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. Mule-Hide Products Co., Inc. does not warrant any results to be obtained. Statements concerning possible use of Mule-Hide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MULE-HIDE DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, except written warranties attached to Mule-Hide products and written warranties signed by an officer of Mule-Hide.

Visit the Mule-Hide website at www.mulehide.com prior to any installation for updated technical specifications and details. Mule-Hide is a U.S. registered trademark. All rights reserved.